



FINAL INSPECTION REPORT
1x2 Wavelength Combiner / Splitter (WDM)

Item #: WD1350A
SN: T019907



Center Wavelength
White Port: 1310 nm
Red Port: 1550 nm
Maximum Optical Power^a
With Connectors or Bare Fiber: 1 W
Spliced: 5 W
Fiber Type: Corning SMF-28E+

Test Data at Center Wavelength ^b		
Port Jacket Color	White	Red
Wavelength	1310 nm	1550 nm
Transmission ^c	97.3%	98.6%
Insertion Loss ^d	0.12 dB	0.06 dB
Isolation ^e	>50.0 dB	35.9 dB

Test Data over Bandwidth ^b		
Bandwidth	1295-1325 nm	1535-1565 nm
Transmission ^c	97.5%	97.3%
Insertion Loss ^d	0.11 dB	0.12 dB
Isolation ^e	17.5 dB	19.3 dB

- a. Specifies the maximum power allowed through the component. Performance and reliability under high power conditions must be determined within the user's setup.
- b. All values are measured at room temperature without connectors.
- c. Calculated from measured insertion loss data below.
- d. Insertion loss is the ratio of the input power to the output power for each port of the wavelength combiner / splitter (WDM).
- e. Isolation represents the minimum crosstalk between ports.

Verified by: _____

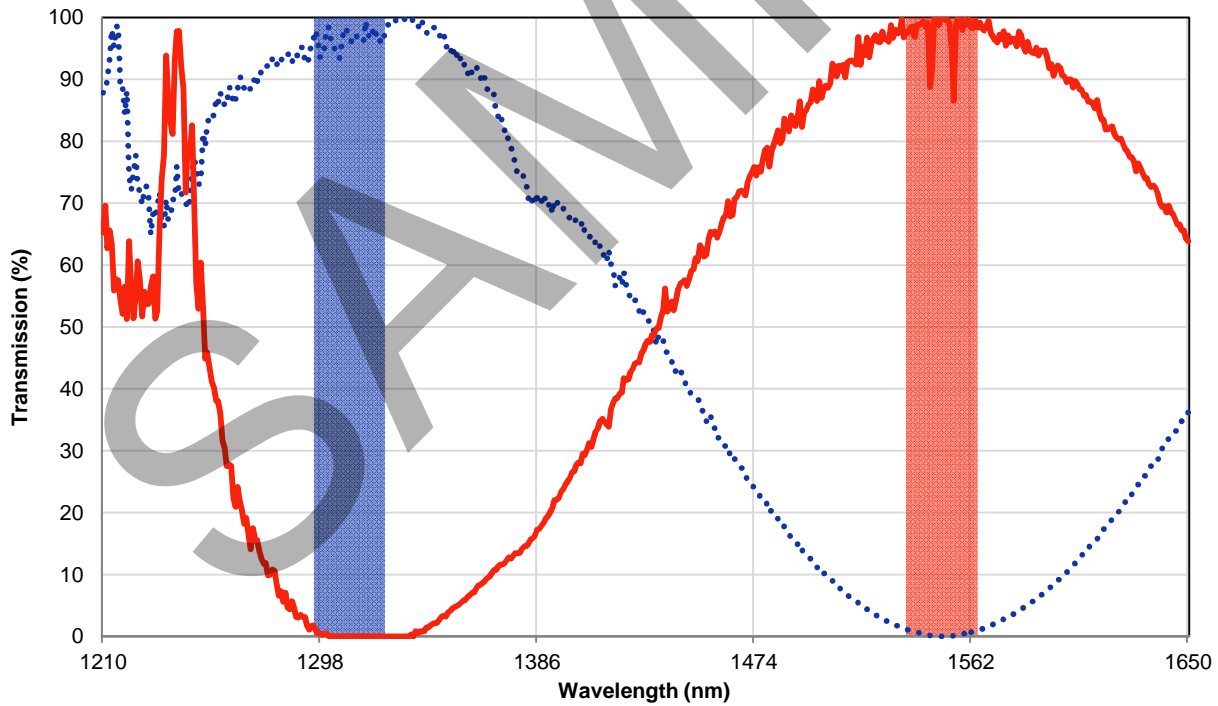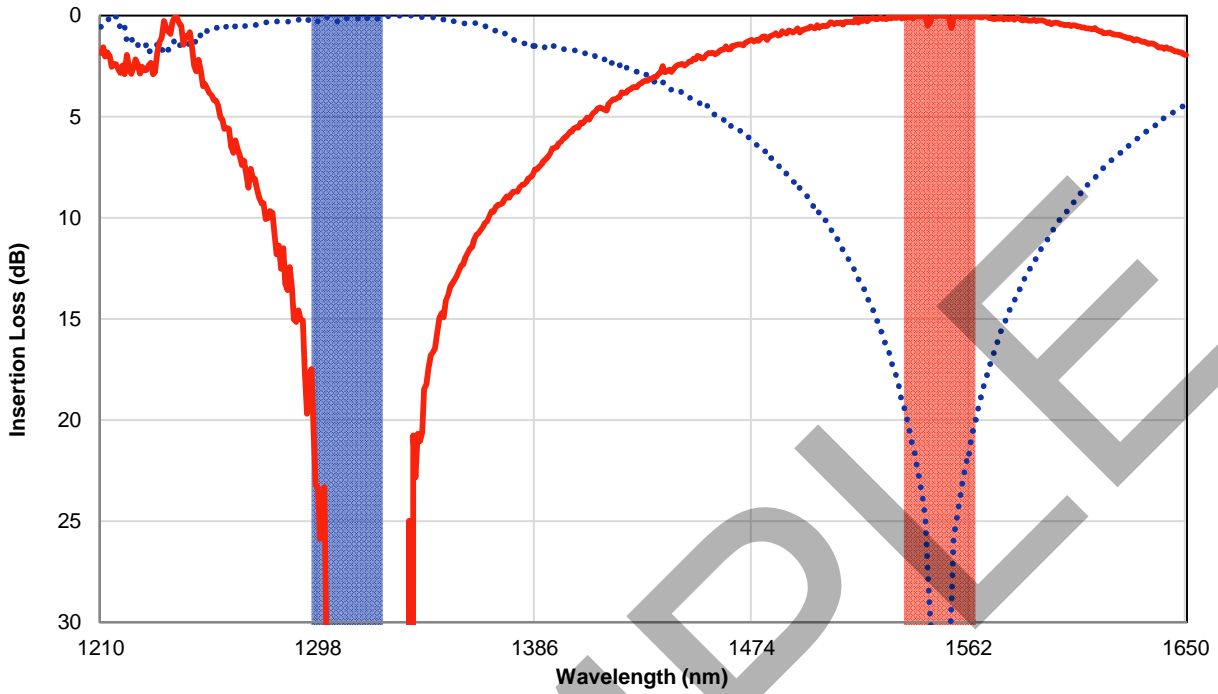

This wavelength combiner / splitter (WDM) operation is only guaranteed over the specified bandwidth as defined by the colored regions above. Thorlabs displays a wider wavelength range to provide insight into how this particular device would perform if used outside its guaranteed operating range. The out-of-band performance can vary from device to device.